

Bill-to-Bill Currency Management System**SECURITY LOCKS INSTALLATION****Lock Installation in the Housing:**


Step #1. Remove the Screw (8201935) and Hatch (5201227) DO NOT DISCARD!

(Please see FIG. 1.)

Step #2. Remove and discard the Tapping screw (8201930), Bushing (5206048),
Handle (5206049) (Fig. 1).


Step #3. Install the lock and parts, as shown below (Fig. 2).

Step #4. Install the Hatch (5201227) and Screw M3x20 (8201935)
that were removed (see Fig.2)

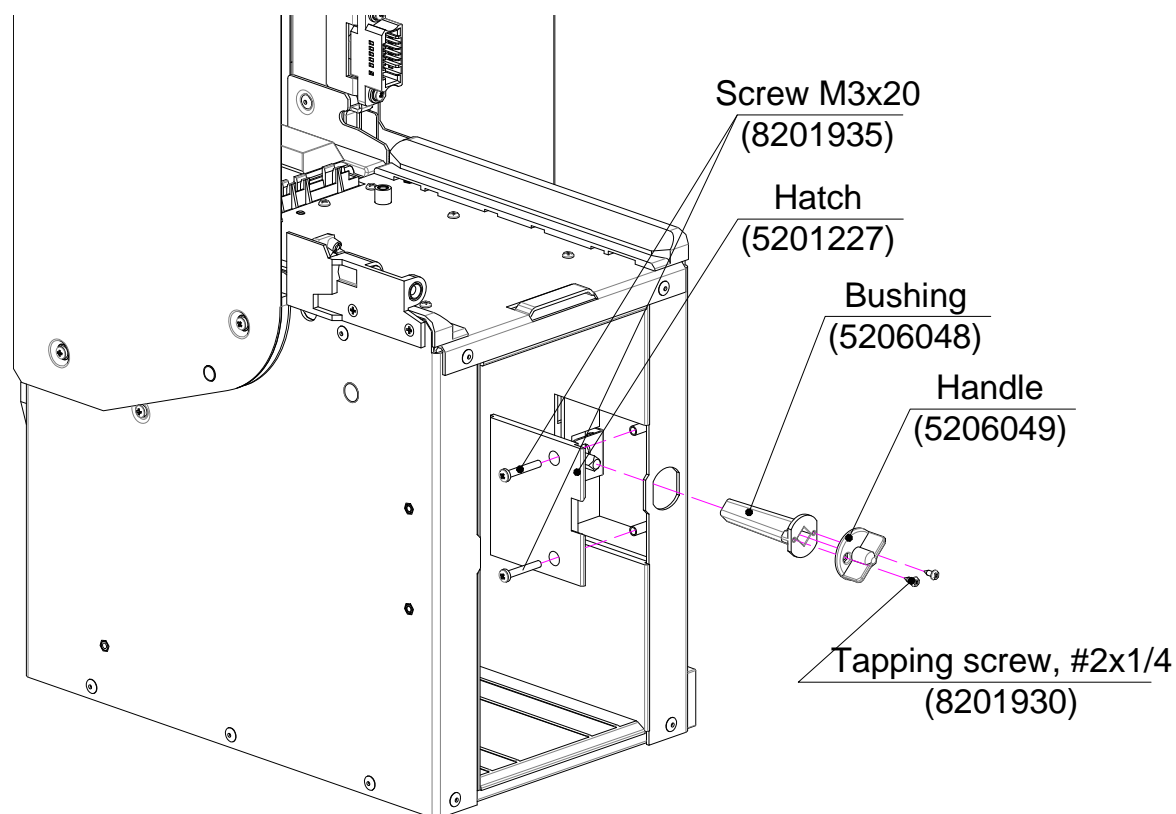

Remove parts of shipping latch

FIG. 1

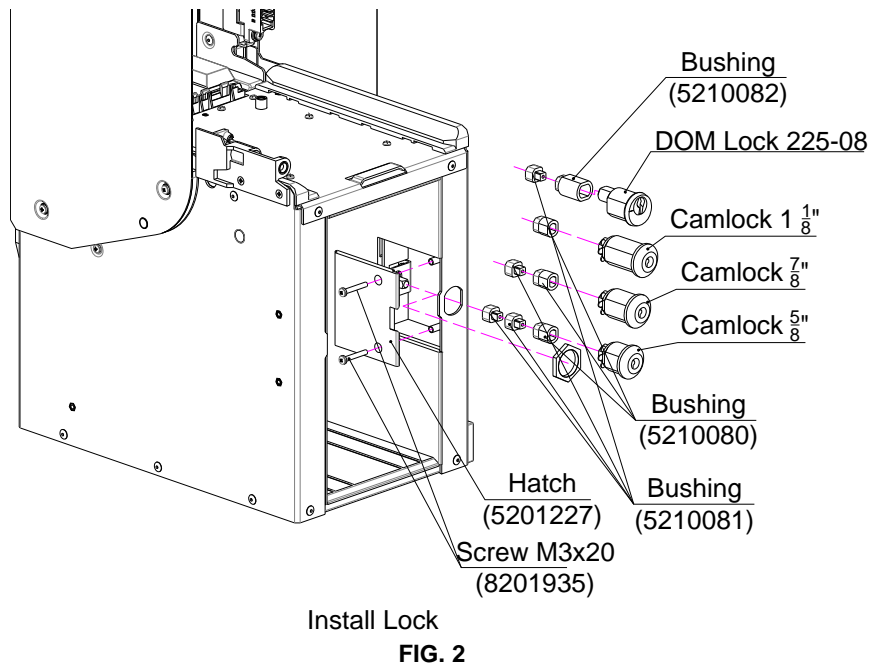

Lock Installation in Chassis:

- Step #1. Remove the chassis from the housing
- Step #2. Remove the dispensing cassette from the chassis
- Step #3. Unscrew two screws and remove the lock bracket from the dispensing cassette (Fig. 4)
- Step #4. Install the lock into the lock bracket (Fig. 5)
- Step #5. Install the lock bracket into the dispensing cassette (Fig. 6)
- Step #6. Install the dispensing cassette into the chassis
- Step #7. Install the chassis into the housing




Fig. 3





Fig. 4

Variant 1

Mounting kit
OPT-MK-BBD,
that includes :
Cam 5106018 ,
Washer 5110034-01
is enclosed

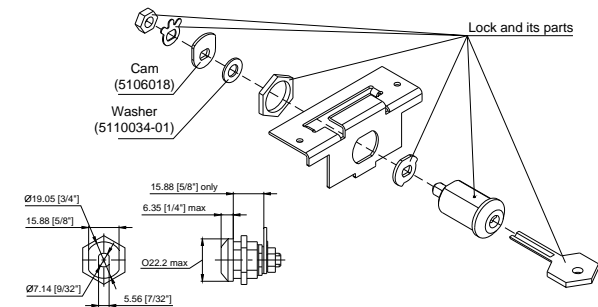

Variant 2

Mounting kit
OPT-MK-BBD1,
that includes :
Lock Washer 8203012;
Cam 5106033-01;
Nut 5310021;
Washer 5310022,
should be ordered
separately.

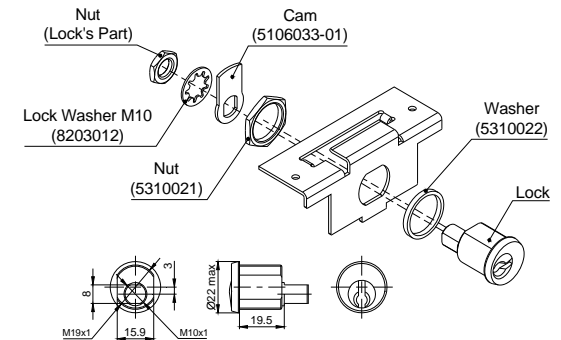


Fig. 5

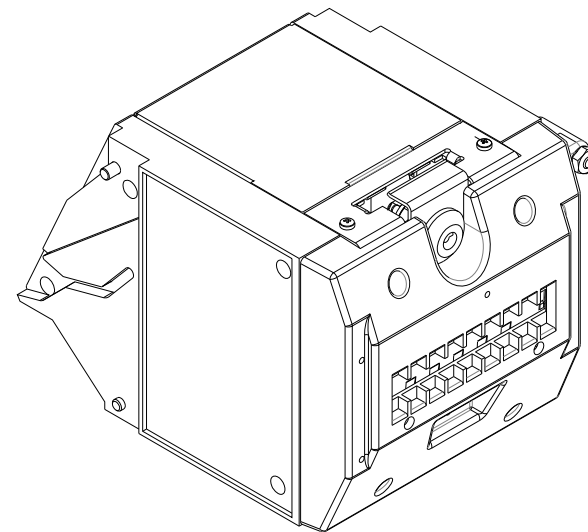


Fig. 6