## **SUZOHAPP**


**Printers** 

# Epic 950<sup>®</sup>

### The Award-winning casino printer

Currently installed in over half a million slots throughout hundreds of casinos worldwide, the Epic 950° thermal printer is famous for its proven reliability.

The Epic 950® is casino-tested and casino-preferred for ticket-IN and ticket-OUT casino printing.

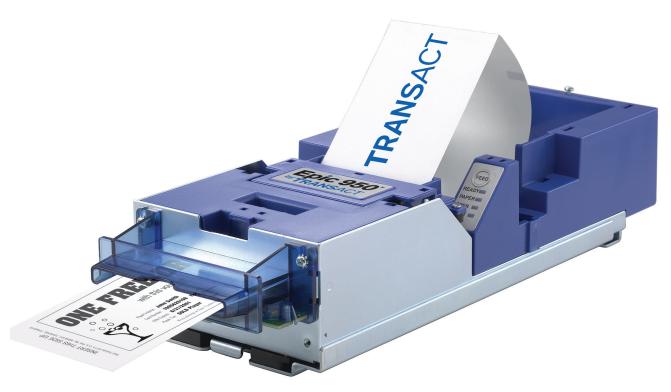



#### **Features**

- Easily integrated: one printer for all kind of games.
- Upgradeable to real-time coupon printing with Epicentral® and ServerPort™.
- Tickets and vouchers become eye-catching branding tools. Ticket size: 65 mm x 156 mm. Monochrome or 2-colours choice: red/black, blue/black, green/black.
- Delivers personalized promotional coupons directly to the players, while they're playing.
- Eliminates player/ticket interference, thanks to TicketBurst™.
- TicketBurst™ technology prints and bursts each gaming voucher before presenting it to eliminate player interference and ensure maximum up time.
- Rugged metal chassis to provide robust grounding design for high ESD immunity and optimal field performance.

- Extensive 8MB RAM and 4MB Flash for printer operations and end-user definables (graphics, fonts and international character sets).
- Barcodes management: Interleaved 2 of 5 (programmable height and width), Code 39, Code 93, UPC-A & UPC-E, Codabar, EAN8 & EAN13, Code 128.
- Multiple indicator lights: ready, paper, open, fault.
- Programmable audible alarms.
- Bitmap graphics, portrait, landscape and page mode printing.
- Different interface options: Serial, Netplex, Netplex/USB.
- Ethernet connection.
- · Standard warrenty: 2 years.

#### **Tools**

- Master Programmer, bezel options, ticket tray options, download kits.
- A smart suite of features: ticket layout editor, software development tools, download utility, Unicode support via downloadable font, packet protocol with CRC check to verify data integrity, printer status reporting, ticket printing status reporting.

#### **Optional accessories**

- Front bezel: internal or external
- 200, 400, 600 count ticket supply box





#### **Technical Specifications**

Dimensions (LxHxW)	285.75 x 67.6 x 113.3 mm
Weight	1.7 Kg
Standard sensors	Top of Form/Ticket OUT, Ticket Taken, Ticket Low, Chassis Open, Burst, Cover Open
Print speed	<ul><li>- 125 mm per second (text mode)</li><li>- 63 mm per second (2-colours mode)</li></ul>
Resolution	496 dots per line
Current consumption	24 Vdc: 2.2A maximum (excluding exit lamp), 1.5A maximum (including exit lamp)
Operating temperature	- Typical operating: 5 to 60° C $-$ 10 $\div$ 90% RH $-$ Storage and Shipping: -10 to 50°C