


OGA DIAGONAL: 19.58 [497.4D]
 VA DIAGONAL: 18.86 [479.06]
 PA DIAGONAL: 17.78 [451.66]

THIS PRODUCT IS MANUFACTURED IN ACCORDANCE WITH THE CURRENT CAPACITIVE DELIVERY SPECIFICATION (DOCUMENT #9009030).

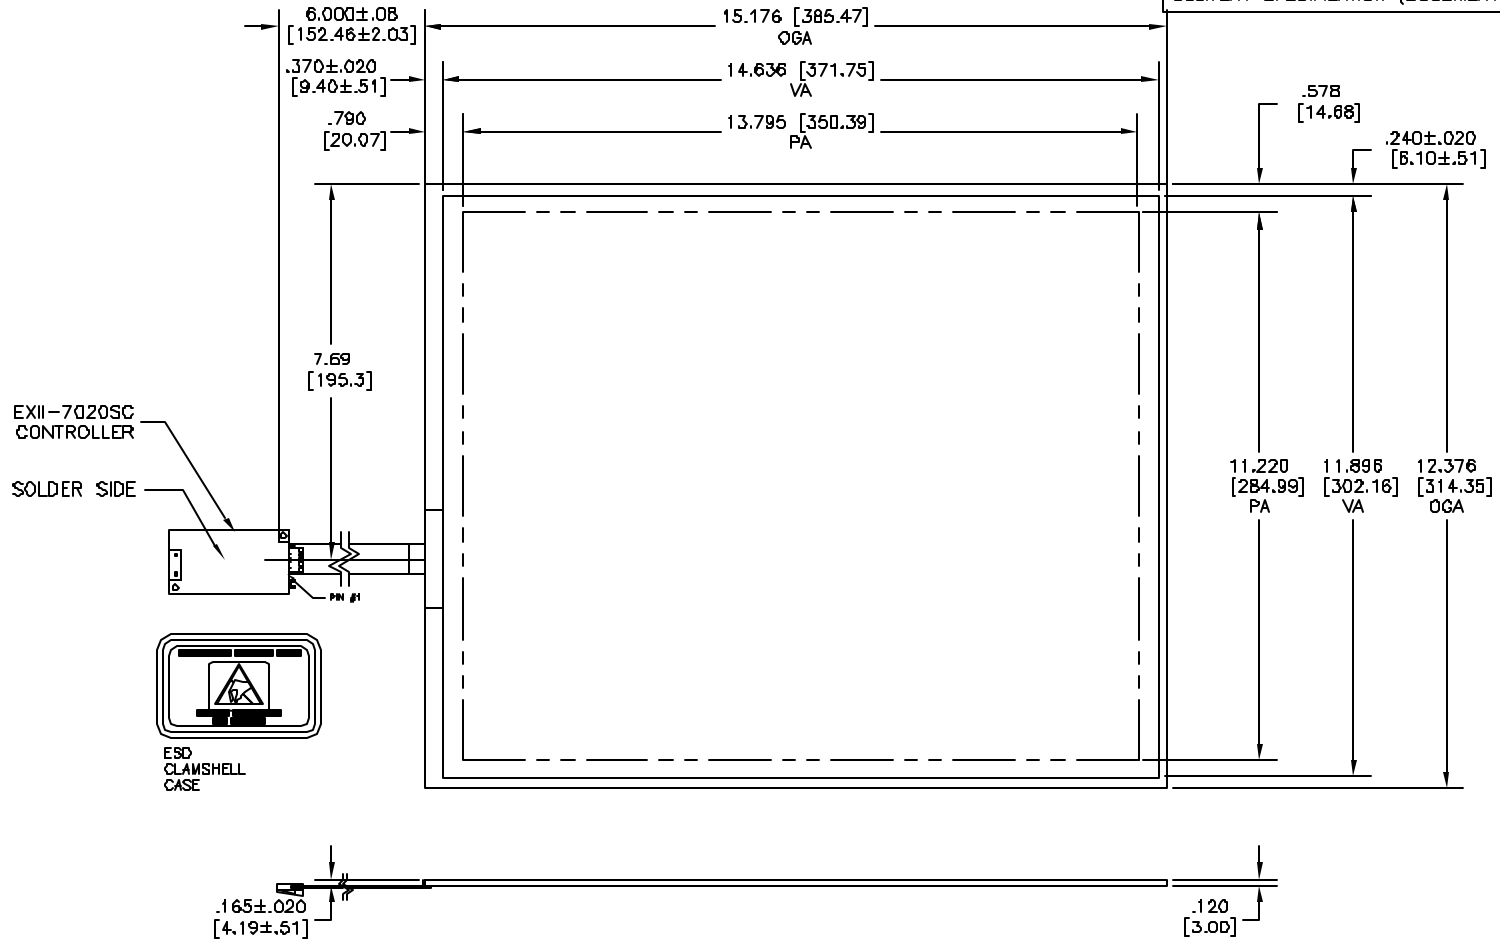

NOTES:

1. WEIGHT OF GLASS IN GRAMS: 923.17±10%

PINOUT	
1	LR
2	LL
3	SHIELD
4	UL
5	UR

UNITS INCHES [MM]

UNLESS OTHERWISE SPECIFIED
 .X ±
 .XX ±.03 [.76]
 .XXX ±.015 [.38]
 ANGLES ±1°



DO NOT SCALE DRAWING

SCALE 1 = 1

3M 3M TOUCH SYSTEMS
 WETUEN, MA
 USA
 COPYRIGHT 2003
 THIS DOCUMENT IS CONFIDENTIAL PROPERTY OF THE 3M COMPANY AND MAY NOT BE REPRODUCED WITHOUT THE WRITTEN PERMISSION OR USED OR DISCLOSED FOR OTHER THAN 3M AUTHORIZED PURPOSES.

DESIGNED BY S. BERARD 07/24/03

REV	CHANGE	DATE	BY
2.1	Change pin 3 from grd to shield	03/04	SEB
2.0	RELEASE PER ECO 010020	10/08/03	SEB
1.0	INITIAL RELEASE PER ECO D15512	07/24/03	SEB

TITLE
 DRAWING 'MD' / FLAT CAP
 15.176 X 12.376 X .12

DATE PLOTTED AUTOCAD SHEET 1 OF 1

SEC C COMMENT NO. MD13-8351-123XX REV 2.1