


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

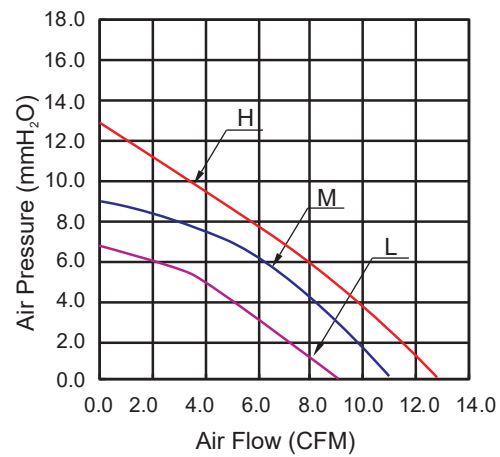

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
BF7530L12S BF7530L12SH BF7530L12D	Sleeve Hydraulic 2-Ball	12V	0.18	2.16	2,500 ± 10%	8.6	6.4	36	75 X 75 X 30
BF7530M12S BF7530M12SH BF7530M12D	Sleeve Hydraulic 2-Ball	12V	0.27	3.24	3,000 ± 10%	10.6	9.4	38	75 X 75 X 30
BF7530H12S BF7530H12SH BF7530H12D	Sleeve Hydraulic 2-Ball	12V	0.45	5.40	3,500 ± 10%	12.3	13.1	43	75 X 75 X 30
BF7530L24S BF7530L24SH BF7530L24D	Sleeve Hydraulic 2-Ball	24V	0.12	2.88	2,500 ± 10%	8.6	6.4	36	75 X 75 X 30
BF7530M24S BF7530M24SH BF7530M24D	Sleeve Hydraulic 2-Ball	24V	0.18	4.32	3,000 ± 10%	10.6	9.4	38	75 X 75 X 30
BF7530H24S BF7530H24SH BF7530H24D	Sleeve Hydraulic 2-Ball	24V	0.24	5.76	3,500 ± 10%	12.3	13.1	43	75 X 75 X 30