
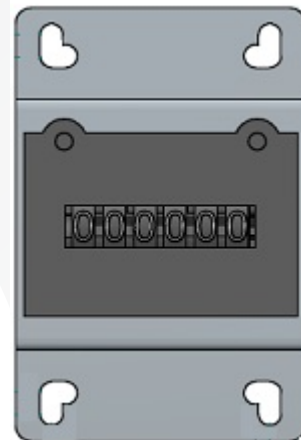



4916 Series

Electromechanical Totaliser

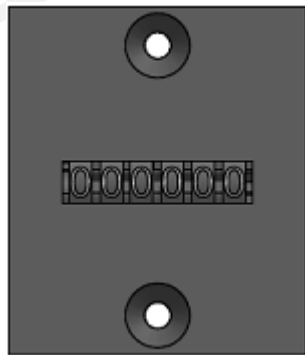

The 4916 Series incorporates the latest manufacturing technology together with a patented basic design to achieve high performance over a wide temperature range with low power consumption. These counters can be mounted by front flange (panel mount), base flange, behind the panel (front mount), or rear screws. The 4916 Series has UL/CSA approvals and can operate over a wide voltage range of DC or AC power.

Key Features

- Low Cost, Large Quantity Discounts
- Patented High Performance Mechanism
- UL & CSA Approved (49 Series)
- Rugged Plastic Package
- Wide Range of Voltages Available
- Long Life

Specifications

- Digits:** 6
- Digit Size:** 0.160" white on black.
- Operating Voltage $\pm 10\%$:**
 - DC: 4.5, 6, 12, 24, 48, 110 (2W)
 - AC: 24, 48, 120, 220 (5VA)
- Reset:** None
- Count Speed:** 10 CPS, standard. 50/50 ratio on/off.
- Max. On Time:** Infinite
- Temperature:** Storage: 14°F to 122°F (-10°C to +50°C).
Operating: 23°F to 104°F (-5°C to +40°C).
- Approvals:** UL# E36690, CSA#
- Termination:** UL/CSA wire leads, 10" long, standard.
- Weight:** 4 oz. (113 g.)

Ordering Code


P49 Counters

		X	X	49	X	X	X	X
Mounting	Blank Rear Mount B Bail Mount D D-Base Mount (Front/H-Base Mount) R Behind the Panel Mount (Front) P Panel Mount (Flange 1.81" x 1.81") FL Flange Mount (1.53" x 1.8) RV Combo Front/V-Base Mount							
Voltage	1 230 VAC 2 115 VAC 3 24 VAC 7 110 VDC 8 24 VDC 9 12 VDC 11 5 VDC							
Product Number	49 Product Number							
Reset	1 Non-reset							
# of Figures	6 6 Figure							
Suffix	Blank Counter Set at 999800 (Standard) A Counter Set at 000000 B Counter Set at 999980 C 24" Lead Wires D Diode Suppresion							


Standard Configurations shown below in the part number section

Product Dimensions


D - D-Base Mount

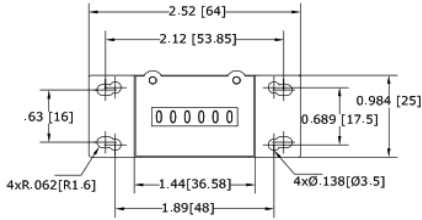


MB - Combo Rear/Special Metal Base Mount




V - V-Base Mount

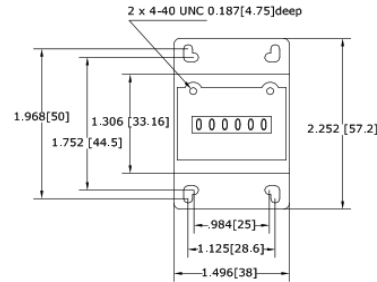


RV - Combo Front/V-Base Mount



R - Behind the Panel Mount (Front)

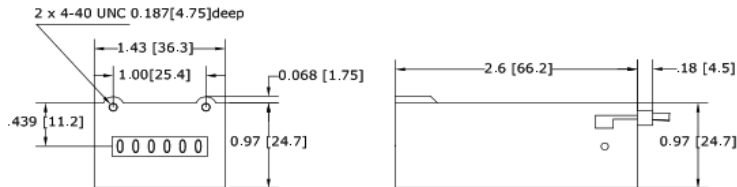

FL - Panel Mount (Flange FL) 1.535x1.8 [39 x45.7]

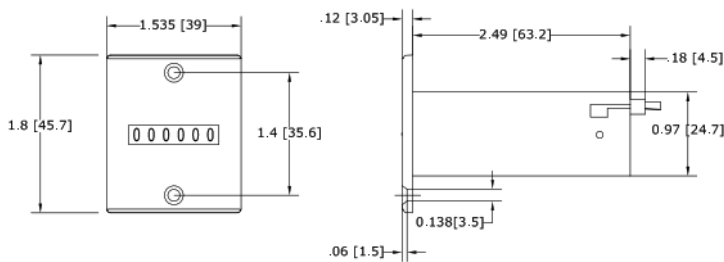

Part Numbers

FL12-4916 230VAC/50HZ, 6 figures, panel mount
 FL2-4816 115VAC, 6 figures, panel mount
 FL3-4916 24VAC, 6 figures, panel mount
 FL7-4916CD 24VAC, 6 figures, panel mount, w/diode, 24" LDS
 FL8-4916D 24VDC, 6 figures, panel mount, w/diode
 R11-4916D 5VDC, 6 figures, front mount, w/diode
 R2-4916 115VAC, 6 figures, rear mount
 R8-4916 24VDC, 6 figures, rear mount
 R9-4916AD 12VDC, 6 figures, rear mount, w/diode, set @ 000000

RV1-4916 230VAC, 6 figures, front & V-base mount
 RV2-4916 115VAC, 6 figures, front & V-base mount
 RV3-4916 24VAC, 6 figures, front & V-base mount
 RV8-4916 24VDC, 6 figures, front & V-base mount
 RV9-4916 12VDC, 6 figures, front & V-base mount
 RV11-4916 5VDC, 6 figures, front & V-base mount
 RV2-4916B 115VAC, 6 figures, V-base mount, set @ 999980
 9-4916D 12VDC, 6 figures, rear mount, w/diode

