

ITEM NO.	QTY.	PART NUMBER	VENDOR	DESCRIPTION
1	1	70-36590-00	INA	LED EDGE-LIT PANEL 24VDC
2	1	70-0510-00	NA	POWER HARNESS, BALLY JUMPER CABLE
3	1	S-10075-XX	BRON	BLK D/S FOAM TAPE 1.13 WIDE X .13 THK 75FT ROLL - 900 IN

FEATURES:


- Replaces the top glass lighting the Bally S9000
- Eliminates the ballast and plugs into the game harness
- Energy efficient panel only requires +24vdc 240 mA of power
- Eliminates the use of lamps, which frequently burn out
- Easy installation
- Low heat generation, 70% lower power consumption
- 5-8 year life span
- 3-year warranty on LED circuit
- Components pictured below




70-0510-00
(required)




70-36590-00

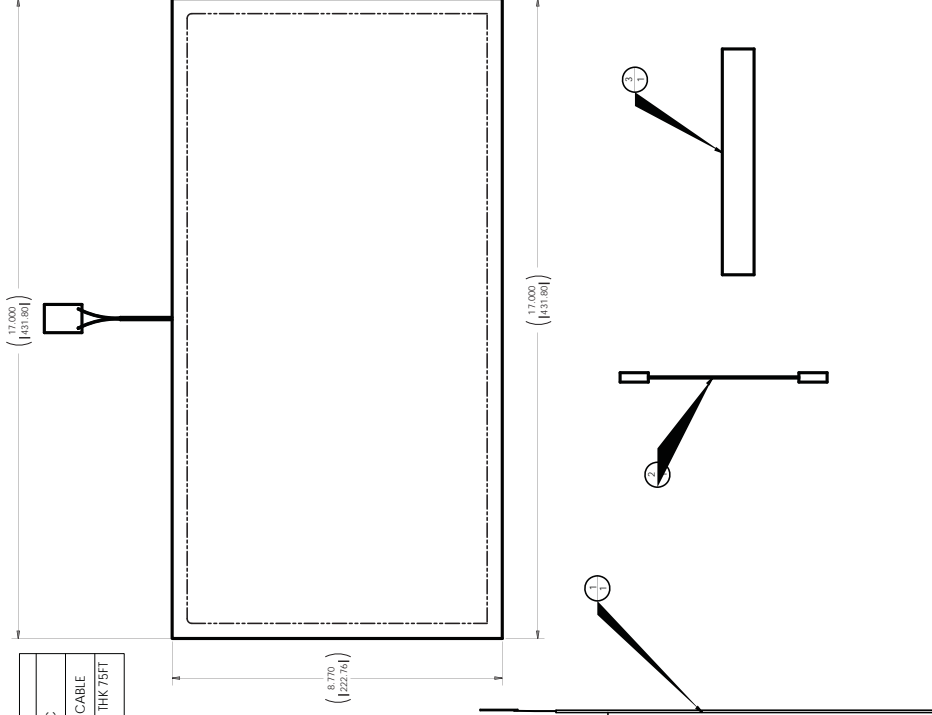

ITEM NO.	QTY.	PART NO.	VENDOR	DESCRIPTION
1	1	S-10075	BRON	BLK D/S FOAM TAPE 1.13 WIDE X .13 THK 75FT ROLL - 900 IN

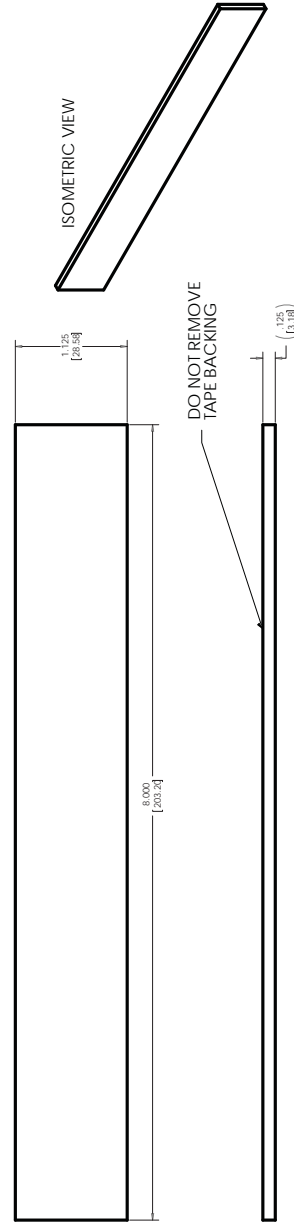

INSTRUCTIONS FOR: Installing Light Pro LED Panel kit on the Bally S9000
 The following part numbers are required for installation:
 Light Pro LED Panel: 70-36590-00
 Power Harness Adapter: 70-0510-00
 8" Double-Sided Foam Tape: S-10075-30
 Instruction Sheet

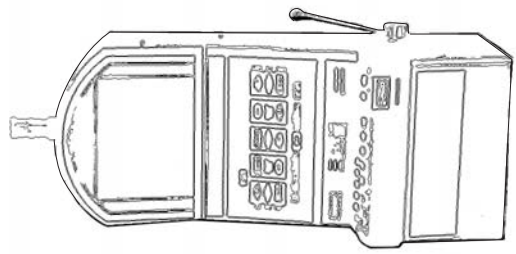

INSTALLATION:

1. Remove top box glass
2. Remove F12T9 fluorescent bulb
3. Unplug and remove light ballast
4. Remove the three circle clips that were holding the F12T9 fluorescent bulb
5. Bend the small metal handle on the reflector back using pliers
6. Attach the LED panel with double sided tape
7. Plug in the light panel using the power adaptor harness (PN- 70-0510-00) to the ballast input connector. It should be 24VDC 2 pin connector.
8. Test for proper operation
9. Reinstall glass

INSTALLED:

